


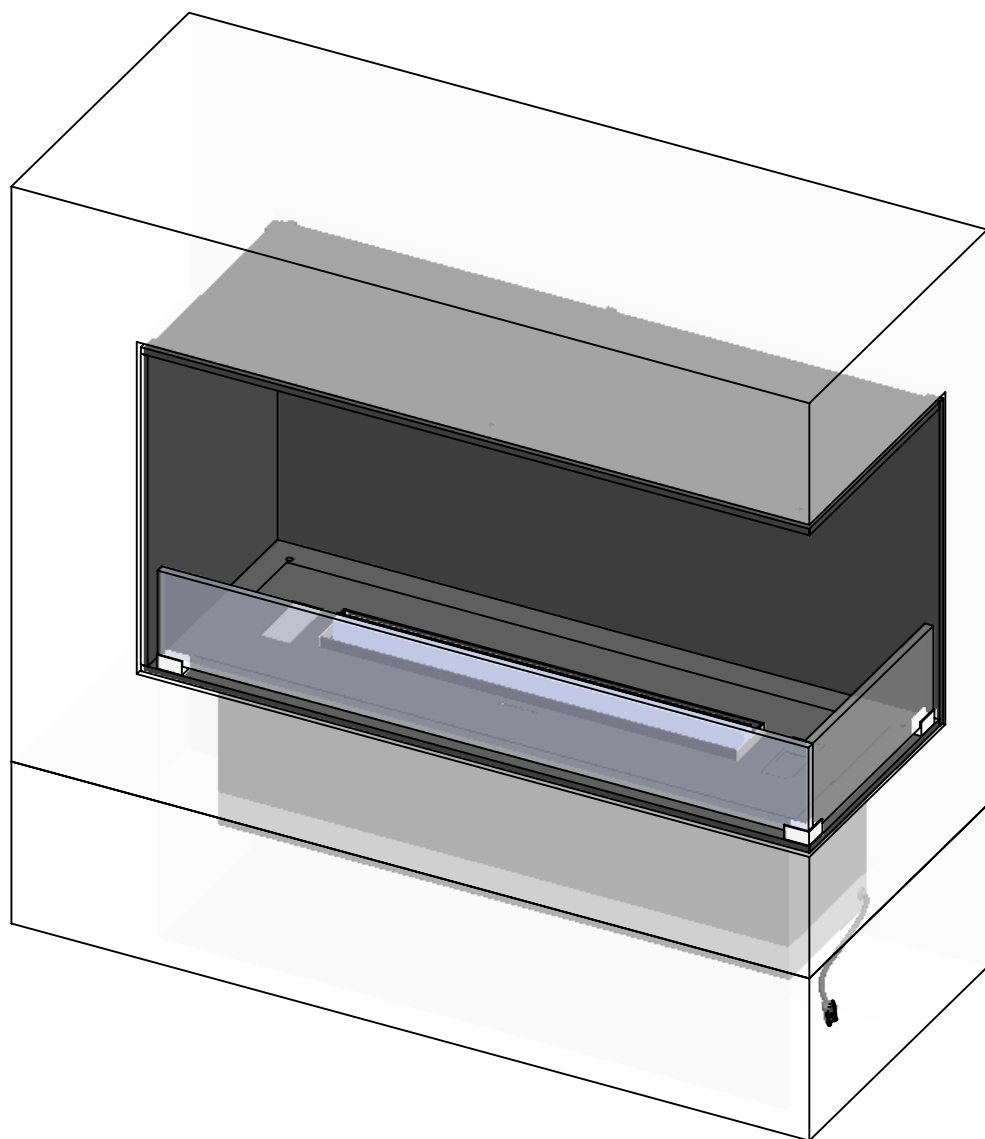

DK - VARENR.
UK - ITEM NO.

44924

DK - Montreal åben til front og højre
deco**flame**® Montreal Hybrid Mist 720 - Glas monteret på pejseindsats
Pejs (LxHxD) 800x400x303mm, Sort
Hulmål inkl. finish* (LxHxD) "805x410x308mm"
Aluminium brænderør 500mm
Kontrol panel, Fjernbetjening, Bluetooth / App & 6 flammetrin inkl. ECO wave
Glas, front (02279) 779x110x10mm, Glas, side (02282) 273x110x10mm

BLUETOOTH CODE:

REKV. NO. :

UK - Montreal Open to front and right

deco**flame**® Montreal Hybrid Mist 720 - Glass mounted on fireplace casing
Fireplace casing (LxHxD) 800x400x303mm, Black
Wall cut-out incl. finish* (LxHxD) "805x410x308mm"
Aluminium flame tray 500mm
Control panel, Remote control, Bluetooth / App & 6 flame steps incl. ECO wave
Glass, front (02279) 779x110x10mm, Glass, side (02282) 273x110x10mm

DELIVERY FROM WEEK:

Dimensions in millimeters Page 1 / 6

Decoflame ApS
Vang Mark 2
9380 Vestbjerg
Denmark
Tlf: +45 9630 4800



bestilling@decoflame.dk

Copyright of Decoflame ApS Denmark, whose property this document remains. No part thereof may be disclosed, copied, duplicated or in any other way made use of, except with the approval of Decoflame ApS Decoflame Denmark.


PEJSEHUL / FIREPLACEHOLE

Pejsehullet skal være konstrueret i brandhæmmende materiale i forhold til DS/EN 13501-2. Biopejsvæggen skal være med en BS-konstruktion. Materialet skal overholde minimum A2-s1, d0.


Pejsehullet skal være hermetisk lukket i både top og sider, således at der ikke opstår falsk gennemtræk. Dette gælder også ledningsudtaget, hvor der enten fuges omkring ledningen eller tilslukkes med brandhæmmende skum.

Decoflame anbefaler, at man **IKKE** fuger omkring pejsens casing. Den 5mm skyggekant sikrer, at pejsen både kan ventilere og isolere, således en varmegennemstrømning i væggen minimeres. Derudover kan fugen på sigt risikere at krakelere og/eller misfarves.

IKKE GODKENDT / NOT APPROVED (1-4)



Hullet til brænderen er beklædt med træ / The hole for the burner is lined with wood.



For stort et hul omkring ledningshullet, skulle have været fuget / Too much space around the wiring, must be grouted.



Pejsevæggen er ikke sikret mod falsk træk i siderne / The fireplace wall is not secured against false draft in the sides.



Væggen er ikke hermetisk lukket forneden, der kan komme træk / The wall is not hermetically sealed at the bottom, which can cause drafts.

GODKENDT / APPROVED (5-8)



Pejsevæg lukket i top og sider / The fireplace wall closed at the top and sides.



Strømsik 3-benet (Jord) / Power plug 3-pin (Ground).




Alle krydsmaal skal være i vinkel / All cross-measures must be at an angle.



De 2 vægge skal være i vatter / The 2 wall must be in level.

VIGTIGT / IMPORTANT

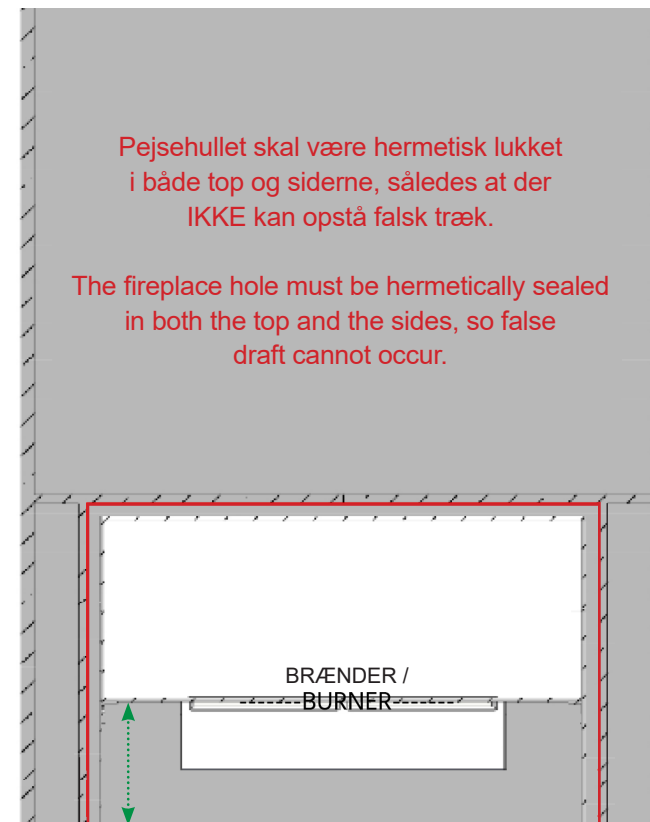

Hulmuren nedadtil (til gulv) må max. være 1000mm i dyben - minimum 400mm.

The cavity wall downwards (to the floor) must max. be 1000mm in depth - minimum 400mm.

Dimensioner i mm. / Dimensions in mm. 2/6


Decoflame Aps
Vang Mark 2
9380 Vestbjerg
Denmark
Tlf: +45 9630 4800

decoflame
bestilling@decoflame.dk

Copyright of Decoflame ApS Denmark, whose property this document remains. No part thereof may be disclosed, copied, duplicated or in any other way made use of, except with the approval of Decoflame ApS Decoflame Denmark.


DK - Færdige hulmål
(LxHxD) 805x410x308mm inkl. finish*

Finish*: Væv, spartel, maling etc.

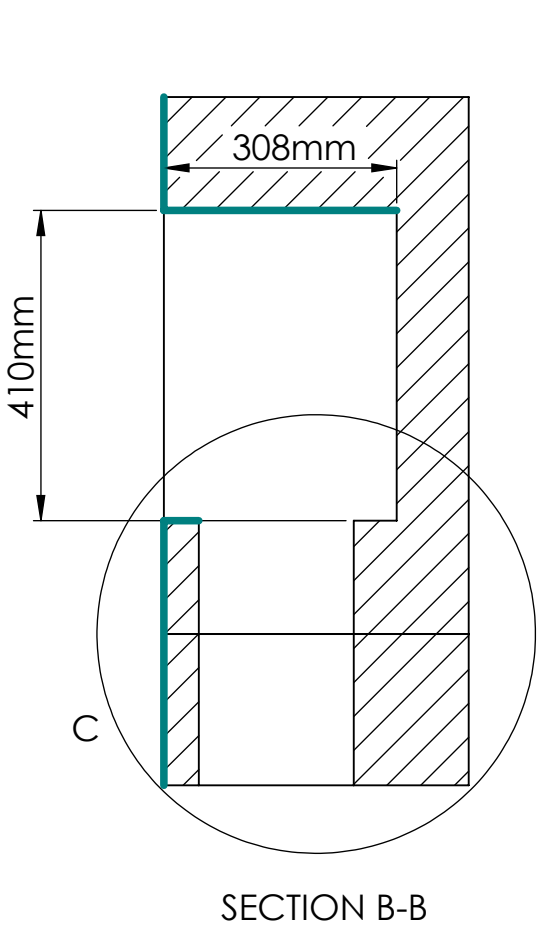


UK - Finished wall cut-out
(LxHxD) 805x410x308mm incl. finish*


Finish*: Fabric, filler, painting etc.

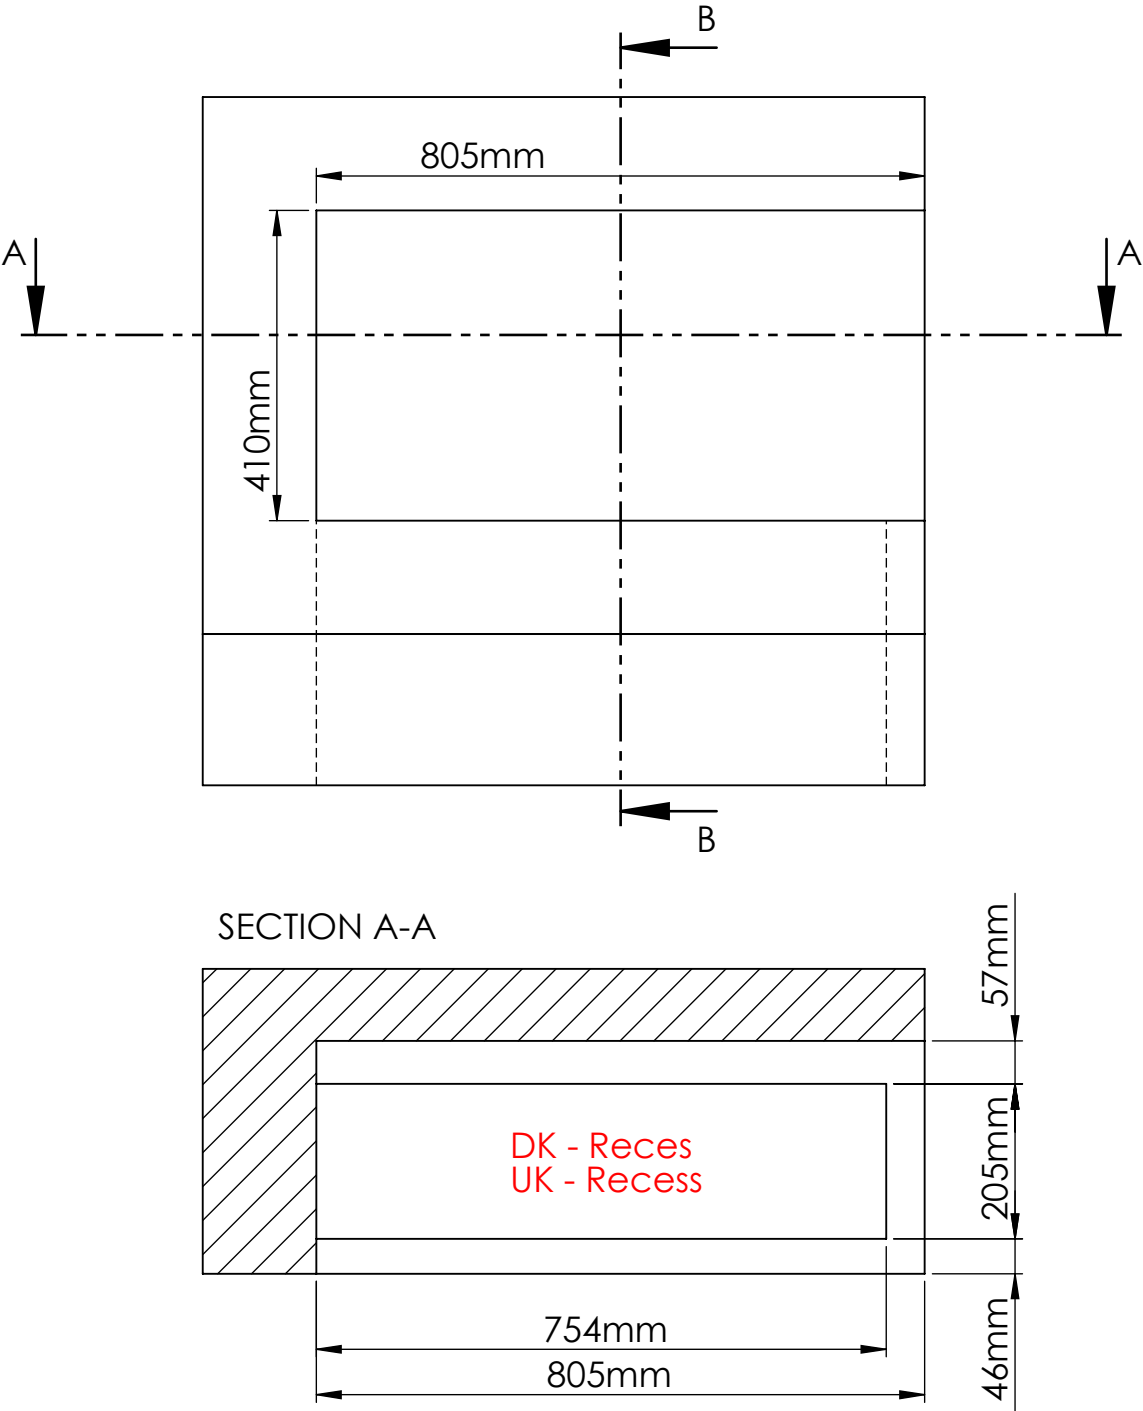

DK recess - Detajle C
SCALE 1 : 8

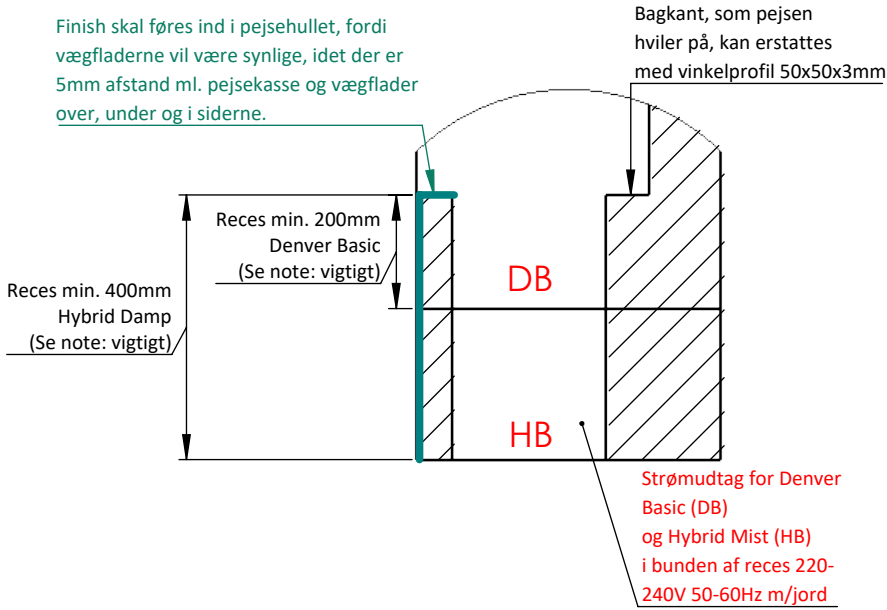

UK recess - Detail C
SCALE 1 : 8

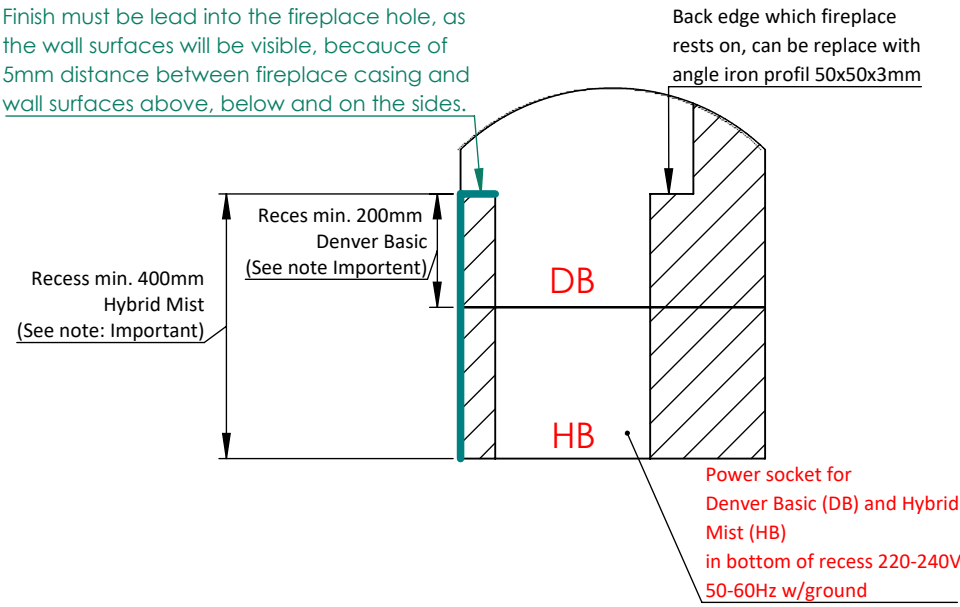

DK - VARENR.
UK - ITEM NO.

44924

DK - Vigtigt

- Vi anbefaler at lave reces/udsparring i væg ned til gulvet = Fremtidssiket til alle Decoflame pejse.
- Hulsten må ikke bruges som øverste skift.

UK - Important

- We recommend to make the wall recess down to the floor. = future-proofed for all Decoflame fireplaces.
- The hollow stone must not be use as upper shift.

Dimensions in millimeters Page 3 / 6

Decoflame Aps
Vang Mark 2
9380 Vestbjerg
Denmark
Tlf: +45 9630 4800
bestilling@decoflame.dk

Copyright of Decoflame ApS Denmark, whose property this document remains. No part thereof may be disclosed, copied, duplicated or in any other way made use of, except with the approval of Decoflame ApS Decoflame Denmark.


BLUETOOTH CODE:

REKV. NO. :


DELIVERY FROM WEEK:

DK - Pejs
(LxHxD) 800x400x303mm


UK - Fireplace
(LxHxD) 800x400x303mm

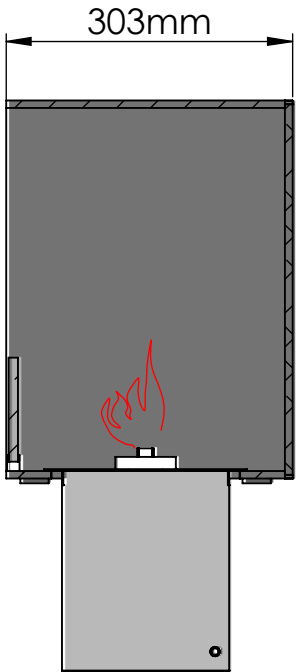

SECTION AG-AG
SCALE 1 : 8

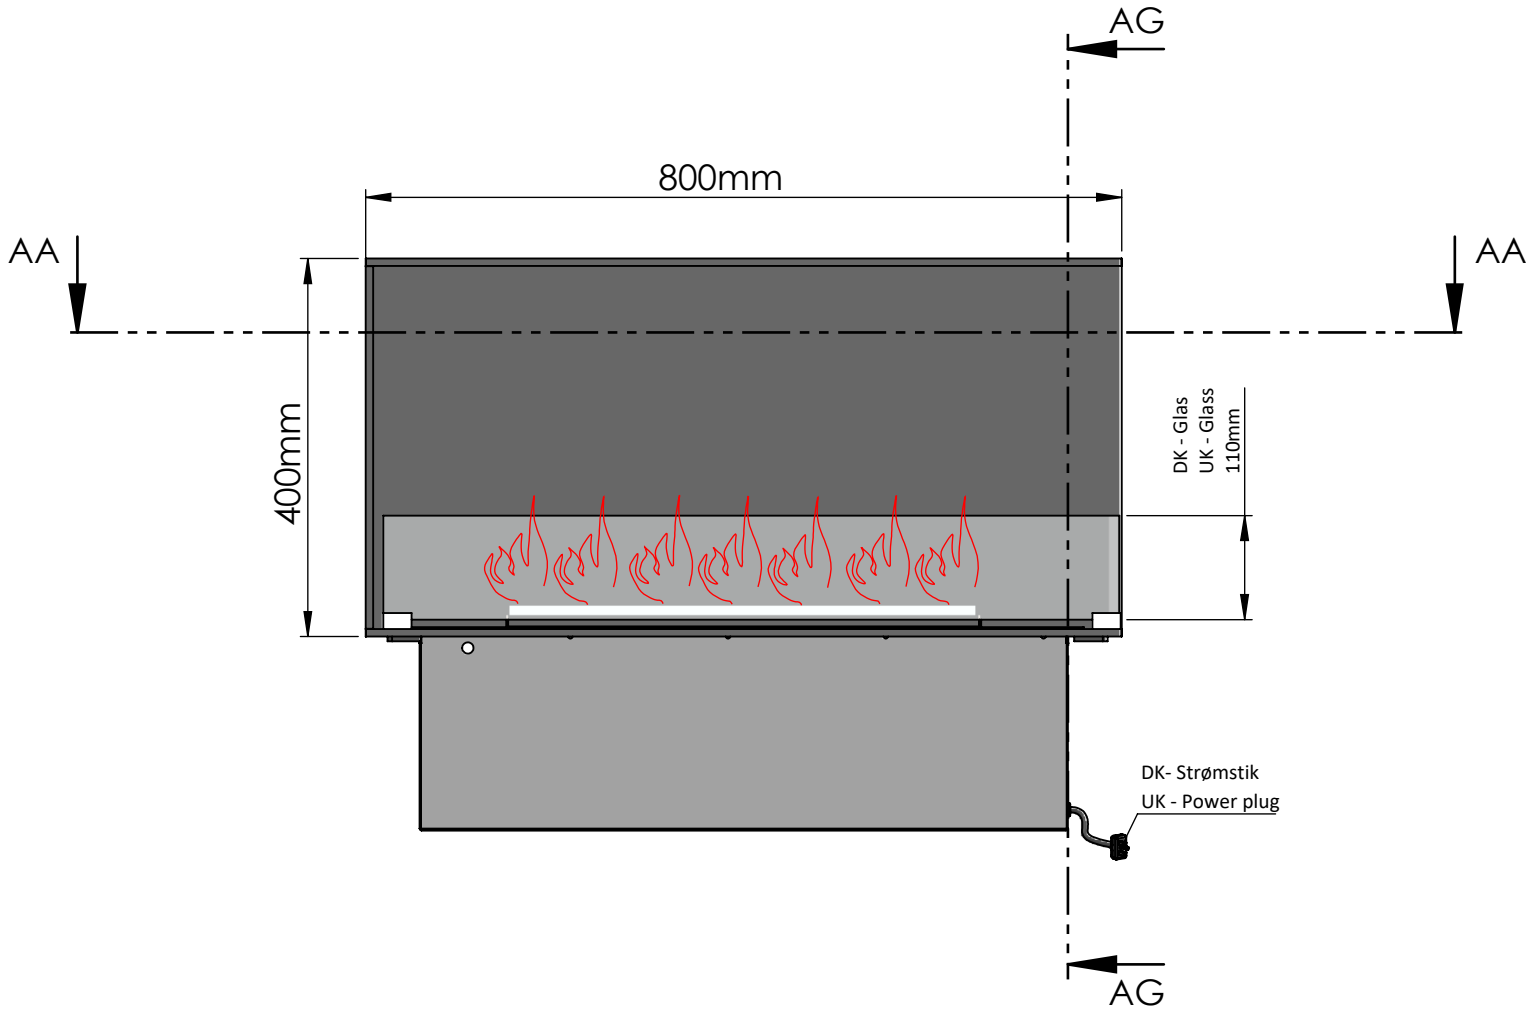

SECTION AA-AA
SCALE 1 : 8

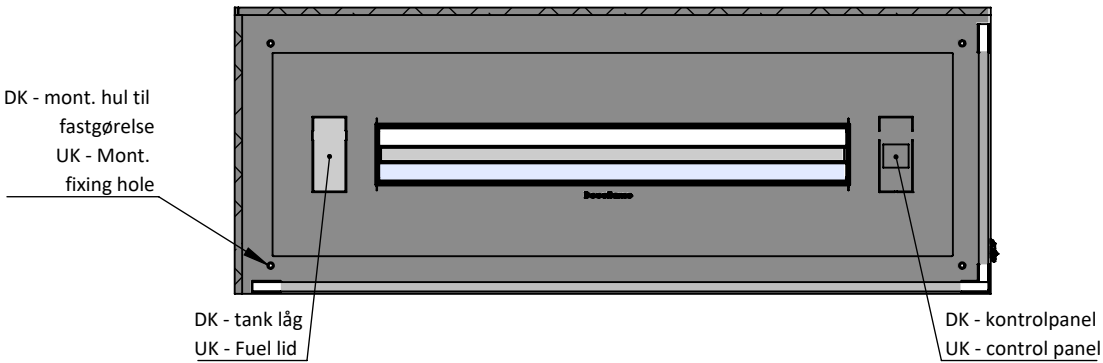

DK - VARENR.
UK - ITEM NO.

44924

DK - OBS. Glas

Der tages forbehold for glastolerancer både i længde og højde på $\pm 2,5\text{mm}$ og i tykkelse på $\pm 0,3\text{mm}$ i henhold til DS/EN 12150

UK - ATTENTION Glass

Reservations are made for glass tolerances both in length and height of $\pm 2.5\text{mm}$ and in thickness of $\pm 0.3\text{mm}$ according to DS/EN 12150.

Dimensions in millimeters Page 4 / 6

Decoflame Aps
Vang Mark 2
9380 Vestbjerg
Denmark
Tlf.: +45 9630 4800



bestilling@decoflame.dk



Copyright of Decoflame ApS Denmark, whose property this document remains. No part thereof may be disclosed, copied, duplicated or in any other way made use of, except with the approval of Decoflame ApS Decoflame Denmark.

BLUETOOTH CODE:


REKV. NO. :

DELIVERY FROM WEEK:


DK: Ventilation
UK: Ventilation

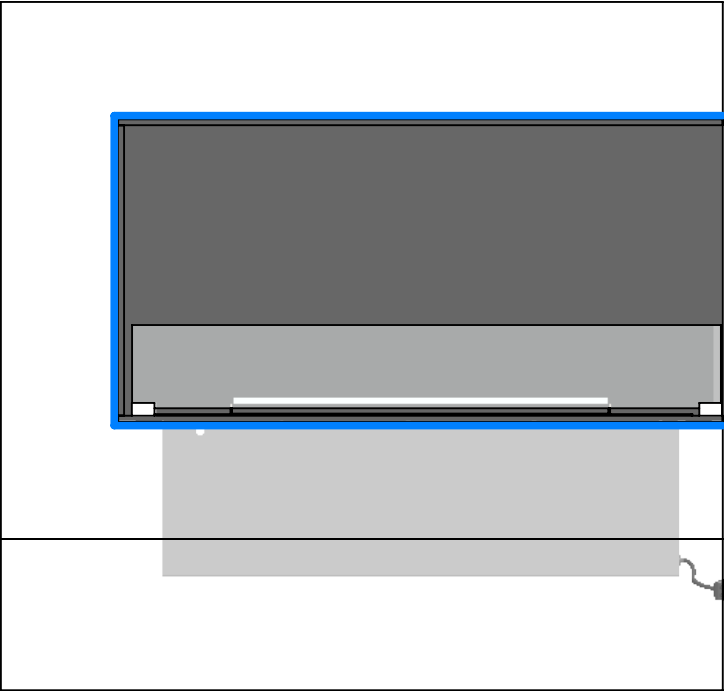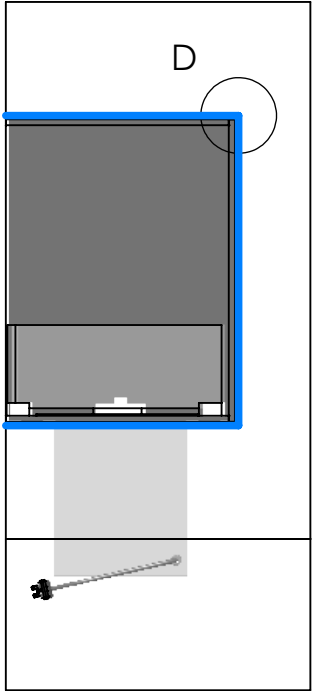

DK - Pejs inkl. væg

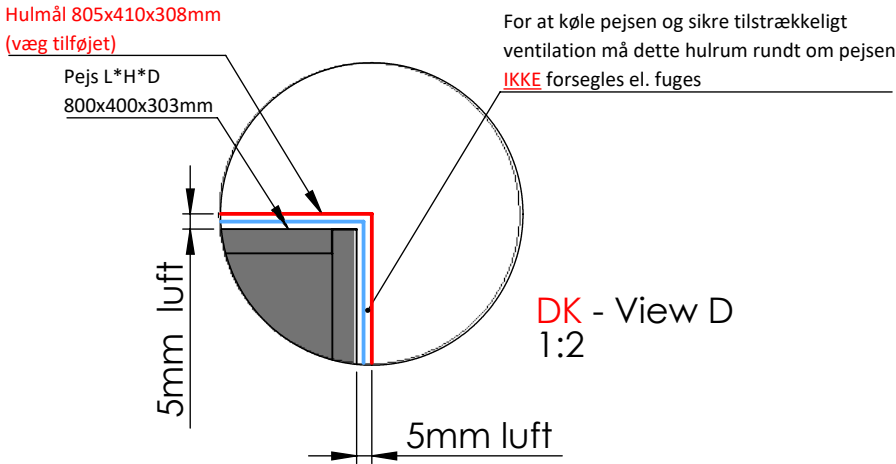

UK - Fireplace incl. wall

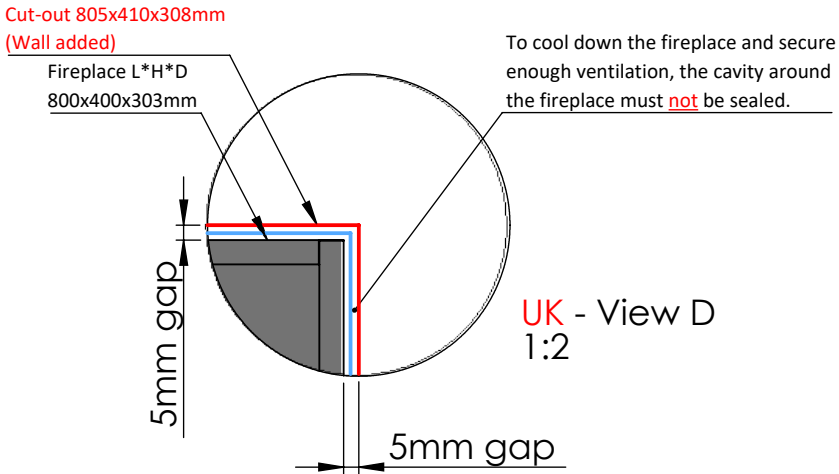

DK - VARENR.
UK - ITEM NO.

44924

DK eksempler på pejse

Hullet omkring pejsen
må ikke forsegles el. fuges

UK exsamples of fireplaces

Do not seal the gap

Dimensions in millimeters Page 5 / 6

Decoflame Aps
Vang Mark 2
9380 Vestbjerg
Denmark
Tlf: +45 9630 4800




bestilling@decoflame.dk

Copyright of Decoflame ApS Denmark, whose property this document remains. No part thereof may be disclosed, copied, duplicated or in any other way made use of, except with the approval of Decoflame ApS Decoflame Denmark.

BLUETOOTH CODE:

REKV. NO. :

DELIVERY FROM WEEK:

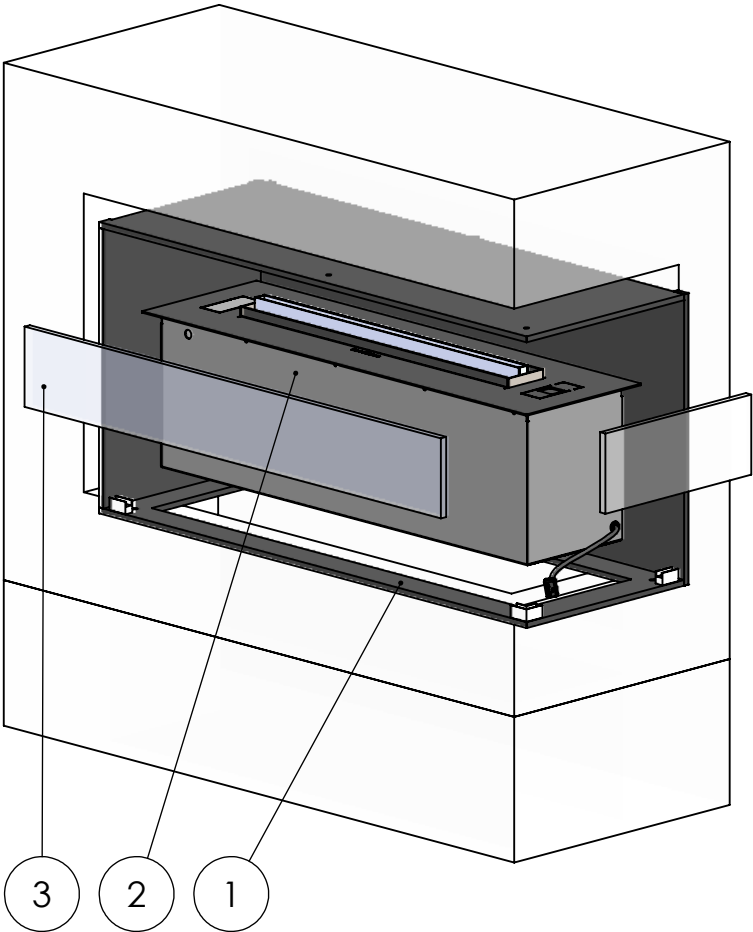

DK - Generelle vejledninger for “decoflame® Hybrid Mist lavet efter mål:

Der er luft imellem vægflader og pejseflader. Dette er for at sikre tilstrækkeligt luftstrøm af pejsen. Derudover er det vigtigt at opretholde 5mm luft rundt om pejsenindsatsen. Fordelene er følgende:

- Korrekt ventilation og isolering af pejsen.
- Forøget levetid på pejsen, grundet mindre risiko for fugt.
- Pænere finish end ved fugning.
- Optimale og rolige flammer.
- Mulighed for konvertering til anden brænder (Manuel konvertibel el. Denver Basic).

Hulmur (udskæring) = pejsen dimensioner + 10mm. Denne åbning må ikke forsegles el. fuges. Da hjørnerne af hulumuren forbliver synlige, er det vigtigt, at finishen er retvinklet og skarpkantet (af højeste kvalitet). Alle 4 hjørner skal være præcist 90°.

Vægge
Overflader inde i hulmur skal udføres i **ikke** brandbart materiale.

Sten /mursten
Hulmur (udskæring) laves iht. tegninger på murstensvæg: 44914, 44915, 44916 og 44917.

Vigtigt
Hulrum for pejsen skal være hermetisk lukket, således der ikke dannes falsk luft eller cirkulation, da det vil forringe vandpartikelflowet og pejsens levetid.

DK - Eksploderet view viser installationsproces.

1. Pejsens indsats skal placeres og centrerer i hulmur. Brug egnet plugs og skruer afhængig af vægtypen.
2. Pejsen tilsluttes via stikkontakt (220-240V 50-60Hz m/jord) og nedsænkes forsigtigt i reces.
3. Slutteligt monteres glassene i glasholderne.

UK - General Guidelines for “decoflame® Hybrid Mist made-to-measure fireplaces”:

There is air between surfaces of the wall and fireplace. This to ensure sufficient air flow of the fireplace. Furthermore, it is essential to maintain a 5mm gap around the fireplace. The advantages are the following:

- Correct ventilation and insulation of the fireplace.
- Increased lifespan of the fireplace, due to less risk of mist.
- Nicer finish than with grouting due to the effect of heat (discolouration of the grout).
- Optimal and quiet flames.
- Possibility of conversion to another burner (Manual convertible or Denver Basic).

Wall (cut-out) = the fireplace dimentions + 10mm. This gap may not be sealed or grouted. As the edges of the cut-out remain visible it is important that they are made of the highest possible finish. All four corners of the cut-out must be exactly with an angle of 90 degrees.

Walls
All surfaces inside the wall cut-out are to be covered with **non** combustible material.

Stone / Brick walls
The cut-out is made according to drawings about brick walls: 44914, 44915, 44916 og 44917.

Important
Make sure to create a closed cavity. Cavity may not be able to create false air circulation, as it impacts the mist flow of the flame and lifetime of the fireplace.

UK - Exploded view showing the installation process.

1. The casing of the fireplace is centered in the wall cut-out. Use suited wall plugs depending on the type of wall.
2. The fireplace is plugged in the power outlet (220-240V 50-60Hz w/ground) and lowered into the recess.
3. Gently place the glass on the base plate pins.

DK - VARENR.
UK - ITEM NO.

44924

DK - Generelle vejledning
+ Eksploderet visning

UK - General guidelines
+ Exploded view

Dimensions in millimeters Page 6 / 6

DecoFlame Aps
Vang Mark 2
9380 Vestbjerg
Denmark
Tlf: +45 9630 4800
bestilling@decoflame.dk



BLUETOOTH CODE:

REKV. NO. :

DELIVERY FROM WEEK:

Copyright of DecoFlame ApS Denmark, whose property this document remains. No part thereof may be disclosed, copied, duplicated or in any other way made use of, except with the approval of DecoFlame ApS DecoFlame Denmark.